

# 7591 S

## POWER PENTODE

Base: OCTAL

$$U_f = 6,3 \text{ V}$$

$$I_f = 0,8 \text{ A}$$

### Typical characteristic:

Class A1 amplifier

$$U_a = 300 \text{ V}$$

$$U_{g2} = 300 \text{ V}$$

$$U_{g1} = -10 \text{ V}$$

$$I_a = 60 \text{ mA}$$

$$I_{g2} = 8 \text{ mA}$$

$$S = 10 \text{ mA/V}$$

$$R_i = 29 \text{ k}\Omega$$

$$\mu = 16,8$$

### Limiting values:

$$U_a = 550 \text{ V}$$

$$U_{g2} = 440 \text{ V}$$

$$W_a = 19 \text{ W}$$

$$W_{g2} = 3,3 \text{ W}$$

$$I_k = 85 \text{ mA}$$

$$R_{g1} = \text{max } 0,3 \text{ M}\Omega$$

(fixed bias)

max 1 M $\Omega$

(cathode bias)

$$U_{kf} = \text{max } 200 \text{ V}$$



### Capacitances:


$$C_{g1} = 10 \text{ pF}$$

$$C_a = 5 \text{ pF}$$

$$C_{a/g1} = 0,25 \text{ pF}$$

## Dimension and connections:

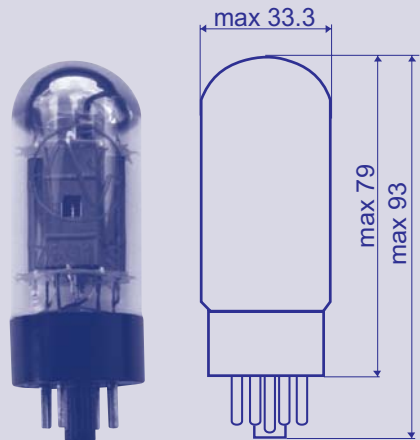

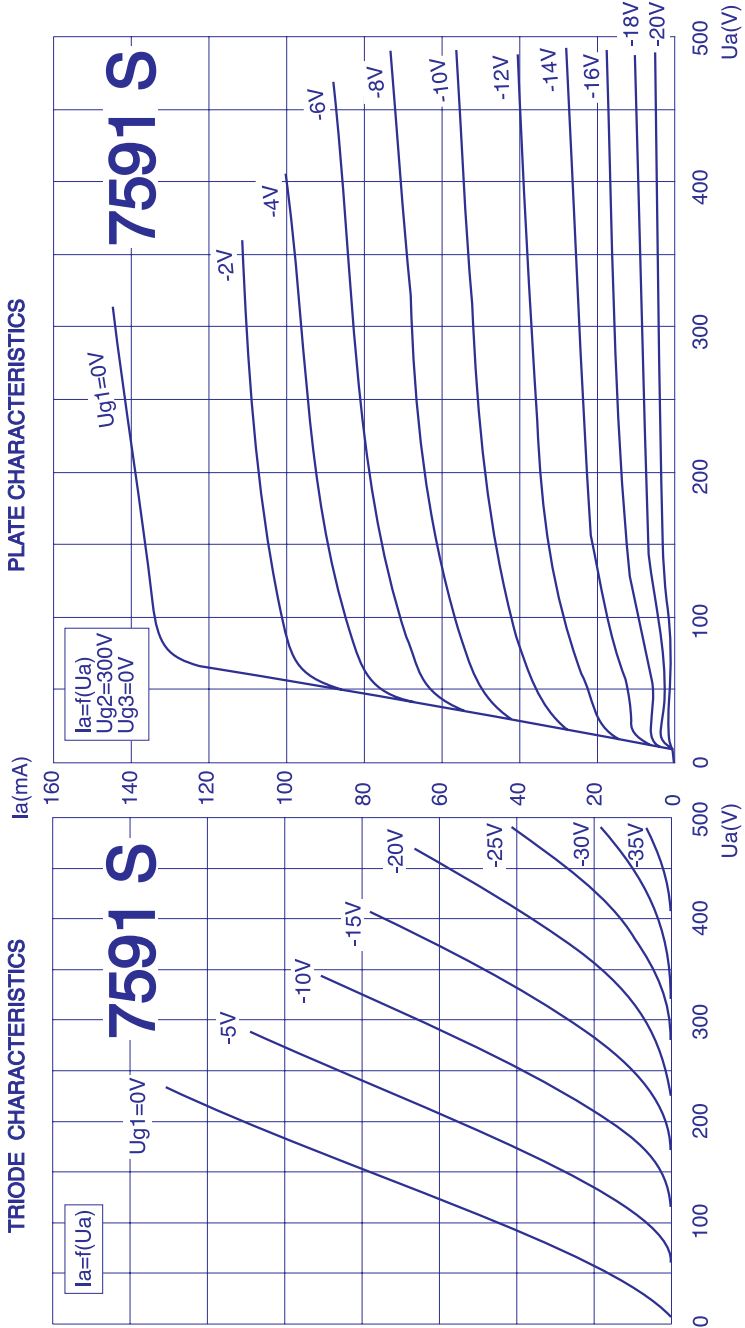

Excellence with every decibel

**Excellence with every decibel**

Excellence with every decibel